

## Specifications / Installation



### Features

- ✓ 5 groups enables you to brew 5 cups of coffee at the same time.
- ✓ You can set recipes you want on mobile app.
- ✓ No complex training is needed to run Boomtle.

### Dimension / Power

#### 5-station

##### Dimensions

Wide 1,112 mm x tall 521mm x deep 204mm

##### Power

110/240V AC, 3A max.

#### 3-station

##### Dimensions


Wide 752 mm x tall 521mm x deep 204mm

##### Power


110/240V AC, 2A max.

### Hole Punching on Table

#### 5-station

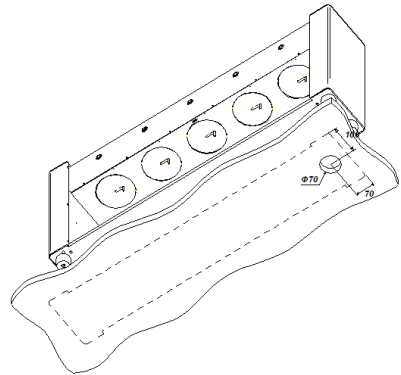

#### 3-station



### Requirements

#### ▷ Networking / IT

Recipes are set on the application of mobile device operating on Android OS. You need to have Android based mobile device that can connect Boomtle by Bluetooth..


#### ▷ Water Supply / Drainage

Main machine is connected to the boiler with 20mm diameter hose. So it needs to have 70mm diameter hole on the table.


#### ▷ Power supply

Need to prepare 40a circuit breaker that will be used only for the boiler, and the power cable for boiler\_6SQ / 3core (VCT6SQ 3C).

## 5-group Installation

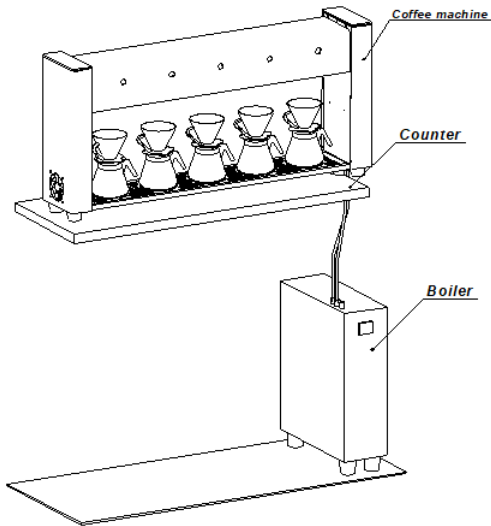

## Connection

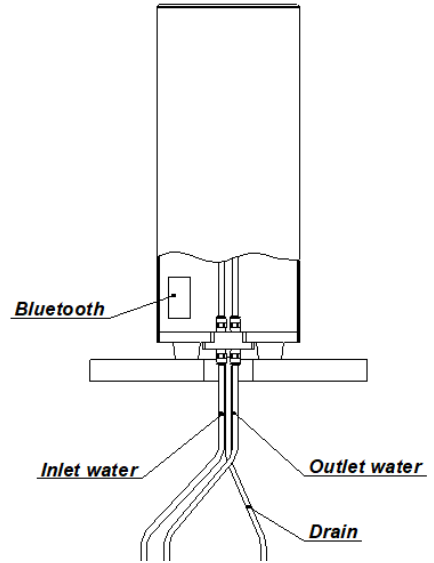

## Under-counter Boiler (included in standard set)



### 5-group boiler 6K(15L)

#### Dimensions

Wide 262mm x Tall 564mm x Deep 460mm

#### Power

6Kw, 30A @ 200-230V AC  
10mm(3/8") NPT Male Fitting



### 3-group Boiler 3K(9L)

#### Dimensions

Wide 162mm x Tall 564mm x Deep 430mm

#### Power

3Kw, 20A @ 220-230V AC  
10mm(3/8") NPT Male Fitting